


Mobile Phone Call RECORDER

V1.0

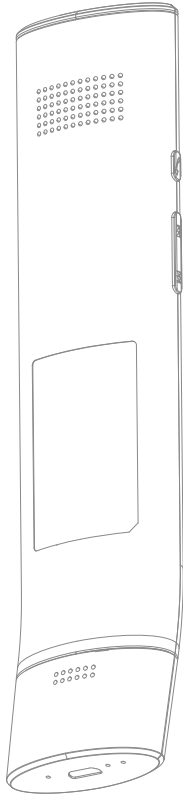

Product Features

- ◆ CSR Bluetooth 4.0 connection, low power consumption.
- ◆ Bluetooth connection, avoid cellphone radiation.
- ◆ Bluetooth connection distance up to 10 meters.
- ◆ Built-in 8R 0.5W high quality ironclad speaker.
- ◆ Operation voice reminder, live recording.
- ◆ Can record 16 hours, automatically delete the earliest recordings when there is not enough memory.
- ◆ Built-in 500mAh lithium battery, continuous call recording up to 7 hours.


Product Functions

- ◆ Automatically record when answer the call, automatically stop recording when the call ended.
- ◆ Automatic answering and automatic message leaving function.
- ◆ Built-in clock chip, the file name of the recordings named by date, easy to find the recording file.
- ◆ Can copy the audio files out, connected to computer by USB data cable.


Product Parameters

- ◆ Working voltage: 5V
- ◆ Shell material: ABS
- ◆ Recording current: ≤80mA
- ◆ Playing current: ≤80mA
- ◆ Standby current: ≤100mA
- ◆ Charging current: ≤200mA
- ◆ Environment: indoor use, relative humidity less than 95%
- ◆ Size: 178*43*17mm

Product Size

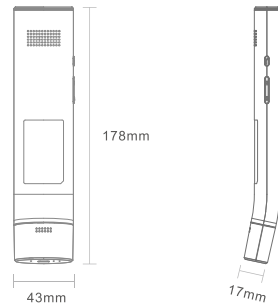

Details Show

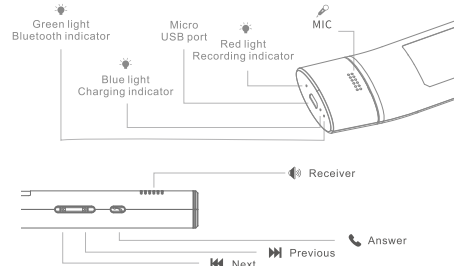


Key Description

	<ol style="list-style-type: none"> 1. Call coming, short press to answer the phone. 2. During the call, short press to hang up. 3. When play the recording, short press to stop playing.
	<ol style="list-style-type: none"> 1. After recording finished, short press to play the last recording, short press again to play the previous one. 2. During the call, long press is to increase volume.
	<ol style="list-style-type: none"> 1. After recording finished, short press to play the last recording, short press again to play the next one. 2. During the call, long press to decrease volume. 2. Long press 5 seconds to delete the recording you listen. After the recording is deleted successfully, it will prompt "Delete success".

Power On/Off

The product is power off by default before delivery. Long press the button "Previous" for 5 seconds, release it when the red light flashing. After power on, there will be power-on prompt tone.

Bluetooth Pairing Connection

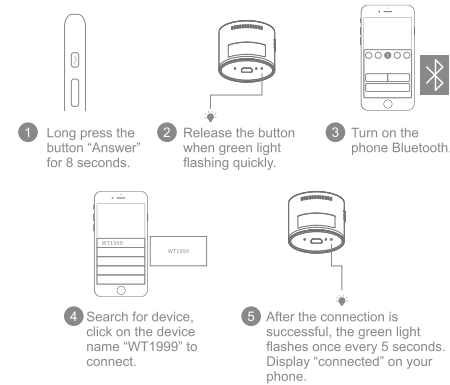

If the connection is unsuccessful, please try the above steps again.

Automatic Answer&Message Leaving Mode

1. Long press the button "Answer" for 3 seconds, release it after red light on. Put the Receiver face up within 3 seconds, then it will automatically response and leave message. When you turn on automatic answer function, it will prompt you. When call coming, over 3s, it will automatically answer the call, and play the built-in audio, like "hello, I'm not convenient to answer your call now, please leave message after the beep sound", then it begins to record. When he ends the call, the recording will automatically stop. If you want to see who call you during this period, press the button "Previous" to listen.
2. In the process of automatic message leaving, the other side can't hear your voice. If you want to answer the phone, directly press the button "Answer". After the call is answered, it will automatically switch back to automatic recording. Next time enter this mode, need to repeat the above steps.
3. If you put the Receiver face down over 3s, it will automatically exit from automatic recording mode. Next time enter this mode, need to repeat the above steps.

Power Saving Mode

1. Long press the buttons "Previous" "Next" simultaneously for 3 seconds. Red light flashing 5 times, enter the power saving mode. When there is no any operation, 10 seconds later, automatically power off, disconnected with mobile phone.
2. When the call coming, if need to record, press the button "Answer", it will play the prompt tone and complete the Bluetooth connection, then automatically answer the phone. If you have used phone to answer and want to record, you can press "Answer" button. Then it will automatically connect with phone and record the call.
3. In power saving mode, long press the buttons "Previous" "Next" simultaneously for 3 seconds. Red light flashing 5 times, enter the standby mode. At this time, mobile phone and this device is in connection status all the time.

Charging/ Recording File Export

1. Charging: charging through micro USB interface. Provide free USB cable to customers. When battery power is low, it will prompt you. Please charge in time when you hear the voice prompt.
2. Recording file export: connect computer by USB cable. The removable disk will appear on computer. Then you can copy or delete the files. Please don't delete the MP3 files in the root directory of memory card, or it cannot work normally.

Time Update

1. When you use this product at the first time, please update the time, so you can find the recording files easily.
2. Create a new TXT document. Modify the name to be "TM". Open the document, enter the current year, month, day, hour, minute, second, such as 20170119191919, means the current time is at 19 o'clock 19 minutes 19 seconds, Jan. 19th, 2017. Save the document. Copy this txt document into the root directory of the memory card.
3. Remove the USB cable, then it will automatically update the time and delete this document automatically.

Operation Notes

1. Please don't delete or modify the MP3 prompt tone in the built-in memory card, not reordered, or the product won't be able to work normally.
2. When enter the automatic answering&message leaving mode, after the key operation is completed, please turn the device over in three seconds. Over the time, it will switch unsuccessfully, need to operate again.
3. The text document suffix cannot be modified. Just need to modify the name. It takes a few time to edit and copy the text document to the device, so please set the time (seconds) more than a few seconds. There will be differences between the updated time and the actual time, but only a few seconds exist difference.
4. In the Bluetooth pairing mode, if you don't use mobile phone to pair, it will exit from pairing mode automatically after 1 minute.
5. In power saving mode, after the device power on, there will be about 3 seconds delay to finish the connection with phone.
6. When the remaining storage space is less than 50 MB, the earliest recordings will be deleted automatically. If the files are very important, please copy out to save in time.